

产品目录 | 联系我们 | 关于我们 | 新闻中心

产品目录

联系我们

关于我们

新闻中心

产品目录 | 联系我们 | 关于我们 | 新闻中心

联系我们

联系我们

YB2-3	3000	3000	IP44	YB2-3	0.75	2.20
YB2-4	3000	3000	IP44	YB2-4	1.1	2.20
YB2-6	3000	3000	IP44	YB2-6	1.5	2.20
YB2-8	3000	3000	IP44	YB2-8	2.2	2.20
YB2-10	3000	3000	IP44	YB2-10	3.0	2.20
YB2-12	3000	3000	IP44	YB2-12	4.0	2.20
YB2-15	3000	3000	IP44	YB2-15	5.5	2.20
YB2-18	3000	3000	IP44	YB2-18	7.5	2.20
YB2-22	3000	3000	IP44	YB2-22	11.0	2.20
YB2-28	3000	3000	IP44	YB2-28	15.0	2.20
YB2-35	3000	3000	IP44	YB2-35	22.0	2.20
YB2-44	3000	3000	IP44	YB2-44	30.0	2.20
YB2-55	3000	3000	IP44	YB2-55	40.0	2.20
YB2-75	3000	3000	IP44	YB2-75	55.0	2.20
YB2-90	3000	3000	IP44	YB2-90	75.0	2.20
YB2-110	3000	3000	IP44	YB2-110	90.0	2.20
YB2-132	3000	3000	IP44	YB2-132	110.0	2.20
YB2-160	3000	3000	IP44	YB2-160	132.0	2.20
YB2-180	3000	3000	IP44	YB2-180	160.0	2.20
YB2-200	3000	3000	IP44	YB2-200	180.0	2.20
YB2-225	3000	3000	IP44	YB2-225	200.0	2.20
YB2-250	3000	3000	IP44	YB2-250	225.0	2.20
YB2-280	3000	3000	IP44	YB2-280	250.0	2.20
YB2-315	3000	3000	IP44	YB2-315	280.0	2.20
YB2-355	3000	3000	IP44	YB2-355	315.0	2.20
YB2-400	3000	3000	IP44	YB2-400	355.0	2.20
YB2-450	3000	3000	IP44	YB2-450	400.0	2.20
YB2-500	3000	3000	IP44	YB2-500	450.0	2.20
YB2-560	3000	3000	IP44	YB2-560	500.0	2.20
YB2-630	3000	3000	IP44	YB2-630	560.0	2.20
YB2-710	3000	3000	IP44	YB2-710	630.0	2.20
YB2-800	3000	3000	IP44	YB2-800	710.0	2.20
YB2-900	3000	3000	IP44	YB2-900	800.0	2.20
YB2-1000	3000	3000	IP44	YB2-1000	900.0	2.20
YB2-1120	3000	3000	IP44	YB2-1120	1000.0	2.20
YB2-1250	3000	3000	IP44	YB2-1250	1120.0	2.20
YB2-1400	3000	3000	IP44	YB2-1400	1250.0	2.20
YB2-1600	3000	3000	IP44	YB2-1600	1400.0	2.20
YB2-1800	3000	3000	IP44	YB2-1800	1600.0	2.20
YB2-2000	3000	3000	IP44	YB2-2000	1800.0	2.20
YB2-2250	3000	3000	IP44	YB2-2250	2000.0	2.20
YB2-2500	3000	3000	IP44	YB2-2500	2250.0	2.20
YB2-2800	3000	3000	IP44	YB2-2800	2500.0	2.20
YB2-3150	3000	3000	IP44	YB2-3150	2800.0	2.20
YB2-3550	3000	3000	IP44	YB2-3550	3150.0	2.20
YB2-4000	3000	3000	IP44	YB2-4000	3550.0	2.20
YB2-4500	3000	3000	IP44	YB2-4500	4000.0	2.20
YB2-5000	3000	3000	IP44	YB2-5000	4500.0	2.20
YB2-5600	3000	3000	IP44	YB2-5600	5000.0	2.20
YB2-6300	3000	3000	IP44	YB2-6300	5600.0	2.20
YB2-7100	3000	3000	IP44	YB2-7100	6300.0	2.20
YB2-8000	3000	3000	IP44	YB2-8000	7100.0	2.20
YB2-9000	3000	3000	IP44	YB2-9000	8000.0	2.20
YB2-10000	3000	3000	IP44	YB2-10000	9000.0	2.20
YB2-11200	3000	3000	IP44	YB2-11200	10000.0	2.20
YB2-12500	3000	3000	IP44	YB2-12500	11200.0	2.20
YB2-14000	3000	3000	IP44	YB2-14000	12500.0	2.20
YB2-16000	3000	3000	IP44	YB2-16000	14000.0	2.20
YB2-18000	3000	3000	IP44	YB2-18000	16000.0	2.20
YB2-20000	3000	3000	IP44	YB2-20000	18000.0	2.20
YB2-22500	3000	3000	IP44	YB2-22500	20000.0	2.20
YB2-25000	3000	3000	IP44	YB2-25000	22500.0	2.20
YB2-28000	3000	3000	IP44	YB2-28000	25000.0	2.20
YB2-31500	3000	3000	IP44	YB2-31500	28000.0	2.20
YB2-35500	3000	3000	IP44	YB2-35500	31500.0	2.20
YB2-40000	3000	3000	IP44	YB2-40000	35500.0	2.20
YB2-45000	3000	3000	IP44	YB2-45000	40000.0	2.20
YB2-50000	3000	3000	IP44	YB2-50000	45000.0	2.20
YB2-56000	3000	3000	IP44	YB2-56000	50000.0	2.20
YB2-63000	3000	3000	IP44	YB2-63000	56000.0	2.20
YB2-71000	3000	3000	IP44	YB2-71000	63000.0	2.20
YB2-80000	3000	3000	IP44	YB2-80000	71000.0	2.20
YB2-90000	3000	3000	IP44	YB2-90000	80000.0	2.20
YB2-100000	3000	3000	IP44	YB2-100000	90000.0	2.20
YB2-112000	3000	3000	IP44	YB2-112000	100000.0	2.20
YB2-125000	3000	3000	IP44	YB2-125000	112000.0	2.20
YB2-140000	3000	3000	IP44	YB2-140000	125000.0	2.20
YB2-160000	3000	3000	IP44	YB2-160000	140000.0	2.20
YB2-180000	3000	3000	IP44	YB2-180000	160000.0	2.20
YB2-200000	3000	3000	IP44	YB2-200000	180000.0	2.20
YB2-225000	3000	3000	IP44	YB2-225000	200000.0	2.20
YB2-250000	3000	3000	IP44	YB2-250000	225000.0	2.20
YB2-280000	3000	3000	IP44	YB2-280000	250000.0	2.20
YB2-315000	3000	3000	IP44	YB2-315000	280000.0	2.20
YB2-355000	3000	3000	IP44	YB2-355000	315000.0	2.20
YB2-400000	3000	3000	IP44	YB2-400000	355000.0	2.20
YB2-450000	3000	3000	IP44	YB2-450000	400000.0	2.20
YB2-500000	3000	3000	IP44	YB2-500000	450000.0	2.20
YB2-560000	3000	3000	IP44	YB2-560000	500000.0	2.20
YB2-630000	3000	3000	IP44	YB2-630000	560000.0	2.20
YB2-710000	3000	3000	IP44	YB2-710000	630000.0	2.20
YB2-800000	3000	3000	IP44	YB2-800000	710000.0	2.20
YB2-900000	3000	3000	IP44	YB2-900000	800000.0	2.20
YB2-1000000	3000	3000	IP44	YB2-1000000	900000.0	2.20
YB2-1120000	3000	3000	IP44	YB2-1120000	1000000.0	2.20
YB2-1250000	3000	3000	IP44	YB2-1250000	1120000.0	2.20
YB2-1400000	3000	3000	IP44	YB2-1400000	1250000.0	2.20
YB2-1600000	3000	3000	IP44	YB2-1600000	1400000.0	2.20
YB2-1800000	3000	3000	IP44	YB2-1800000	1600000.0	2.20
YB2-2000000	3000	3000	IP44	YB2-2000000	1800000.0	2.20
YB2-2250000	3000	3000	IP44	YB2-2250000	2000000.0	2.20
YB2-2500000	3000	3000	IP44	YB2-2500000	2250000.0	2.20
YB2-2800000	3000	3000	IP44	YB2-2800000	2500000.0	2.20
YB2-3150000	3000	3000	IP44	YB2-3150000	2800000.0	2.20
YB2-3550000	3000	3000	IP44	YB2-3550000	3150000.0	2.20
YB2-4000000	3000	3000	IP44	YB2-4000000	3550000.0	2.20
YB2-4500000	3000	3000	IP44	YB2-4500000	4000000.0	2.20
YB2-5000000	3000	3000	IP44	YB2-5000000	4500000.0	2.20
YB2-5600000	3000	3000	IP44	YB2-5600000	5000000.0	2.20
YB2-6300000	3000	3000	IP44	YB2-6300000	5600000.0	2.20
YB2-7100000	3000	3000	IP44	YB2-7100000	6300000.0	2.20
YB2-8000000	3000	3000	IP44	YB2-8000000	7100000.0	2.20
YB2-9000000	3000	3000	IP44	YB2-9000000	8000000.0	2.20
YB2-10000000	3000	3000	IP44	YB2-10000000	9000000.0	2.20
YB2-11200000	3000	3000	IP44	YB2-11200000	10000000.0	2.20
YB2-12500000	3000	3000	IP44	YB2-12500000	11200000.0	2.20
YB2-14000000	3000	3000	IP44	YB2-14000000	12500000.0	2.20
YB2-16000000	3000	3000	IP44	YB2-16000000	14000000.0	2.20
YB2-18000000	3000	3000	IP44	YB2-18000000	16000000.0	2.20
YB2-20000000	3000	3000	IP44	YB2-20000000	18000000.0	2.20
YB2-22500000	3000	3000	IP44	YB2-22500000	20000000.0	2.20
YB2-25000000	3000	3000	IP44	YB2-25000000	22500000.0	2.20
YB2-28000000	3000	3000	IP44	YB2-28000000	25000000.0	2.20
YB2-31500000	3000	3000	IP44	YB2-31500000	28000000.0	2.20
YB2-35500000	3000	3000	IP44	YB2-35500000	31500000.0	2.20
YB2-40000000	3000	3000	IP44	YB2-40000000	35500000.0	2.20
YB2-45000000	3000	3000	IP44	YB2-45000000	40000000.0	2.20
YB2-50000000	3000	3000	IP44	YB2-50000000	45000000.0	2.20
YB2-56000000	3000	3000	IP44	YB2-56000000	50000000.0	2.20
YB2-63000000	3000	3000	IP44	YB2-63000000	56000000.0	2.20
YB2-71000000	3000	3000	IP44	YB2-71000000	63000000.0	2.20
YB2-80000000	3000	3000	IP44	YB2-80000000	71000000.0	2.20
YB2-90000000	3000	3000	IP44	YB2-90000000	80000000.0	2.20
YB2-100000000	3000	3000	IP44	YB2-100000000	90000000.0	2.20
YB2-112000000	3000	3000	IP44	YB2-112000000	100000000.0	2.20
YB2-125000000	3000	3000	IP44	YB2-125000000	112000000.0	2.20
YB2-140000000	3000	3000	IP44	YB2-140000000	125000000.0	2.20
YB2-160000000	3000	3000	IP44	YB2-160000000	140000000.0	2.20
YB2-180000000	3000	3000	IP44	YB2-180000000	160000000.0	2.20
YB2-200000000	3000	3000	IP44	YB2-200000000	180000000.0	2.20
YB2-225000000	3000	3000	IP44	YB2-225000000	200000000.0	2.20
YB2-250000000	3000	3000	IP44	YB2-250000000	225000000.0	2.20
YB2-280000000	3000	3000	IP44	YB2-280000000	250000000.0	2.20
YB2-315000000	3000	3000	IP44	YB2-315000000	280000000.0	2.20
YB2-355000000	3000	3000	IP44	YB2-355000000	315000000.0	2.20
YB2-400000000	3000	3000	IP44	YB2-400000000	355000000.0	2.20
YB2-450000000	3000	3000	IP44	YB2-450000000	400000000.0	2.2

PERFORMANCE DATA
YR SERIES WINDING ROTOR HIGH-VOLTAGE 3-PHASE INDUCTION MOTORS (6kV)

Type	Output KW	Rated Speed r / min	Stator Current A	Full Load		TM/T _n (Standard Value)
				Efficiency % (Standard Value)	Power Factor COSΦ	
YR450-10	355	600	47.9	91.4	0.78	1.8
YR450-10	400	600	53.6	92.1	0.78	1.8
YR450-12	220	500	32.8	89.6	0.72	1.8
YR450-12	250	500	36.8	90.7	0.72	1.8
YR450-12	280	500	40.6	90.9	0.73	1.8
YR500-4	1120	1500	131.1	94.5	0.87	1.8
YR500-4	1250	1500	146.0	94.7	0.87	1.8
YR500-4	1400	1500	163.3	94.8	0.87	1.8
YR500-4	1600	1500	186.5	94.9	0.87	1.8
YR500-6	800	1000	96.1	94.2	0.85	1.8
YR500-6	900	1000	108.0	94.3	0.85	1.8
YR500-6	1000	1000	119.8	94.5	0.85	1.8
YR500-6	1120	1000	134.0	94.6	0.85	1.8
YR500-8	560	750	71.5	93.1	0.81	1.8
YR500-8	630	750	80.2	93.3	0.81	1.8
YR500-8	710	750	90.3	93.4	0.81	1.8
YR500-8	800	750	101.4	93.7	0.81	1.8
YR500-10	450	600	60.1	92.4	0.78	1.8
YR500-10	500	600	65.7	92.7	0.79	1.8
YR500-10	560	600	73.4	92.9	0.79	1.8
YR500-10	630	600	81.5	93.0	0.80	1.8
YR500-10	710	600	91.7	93.1	0.80	1.8
YR500-12	315	500	44.9	91.3	0.74	1.8
YR500-12	355	500	49.8	91.4	0.75	1.8
YR500-12	400	500	56.0	91.6	0.75	1.8
YR500-12	450	500	61.3	91.8	0.77	1.8
YR500-12	500	500	67.8	92.1	0.77	1.8
YR560-4	1800	1500	209.6	95.0	0.87	1.8
YR560-4	2000	1500	232.4	95.2	0.87	1.8
YR560-4	2240	1500	260.0	95.3	0.87	1.8
YR560-6	1250	1000	149.3	94.8	0.85	1.8
YR560-6	1400	1000	167.0	94.9	0.85	1.8




PERFORMANCE DATA
YR SERIES WINDING ROTOR HIGH-VOLTAGE 3-PHASE INDUCTION MOTORS (6kV)

Type	Output KW	Rated Speed r / min	Stator Current A	Full Load		TM/Tn (Standard Value)
				Efficiency % (Standard Value)	Power Factor COSΦ	


YR560-10	1000	600	128.5	93.6	0.80	1.8
YR560-10	1120	600	143.8	93.7	0.80	1.8
YR560-12	560	500	75.9	92.2	0.77	1.8
YR560-12	630	500	85.3	92.3	0.77	1.8
YR560-12	710	500	96.0	92.4	0.77	1.8
YR560-12	980	500	175.0	92.6	0.77	1.8

YR710-10	1800	600	226.0	94.6	0.81	1.8
YR710-12	1250	500	164.2	93.9	0.78	1.8
YR710-12	1400	500	183.7	94.0	0.78	1.8
YR710-16	630	375	91.2	92.3	0.72	1.8
YR710-16	710	375	102.5	92.6	0.72	1.8
YR710-16	800	375	115.3	92.7	0.72	1.8
YR710-16	900	375	129.6	92.8	0.72	1.8

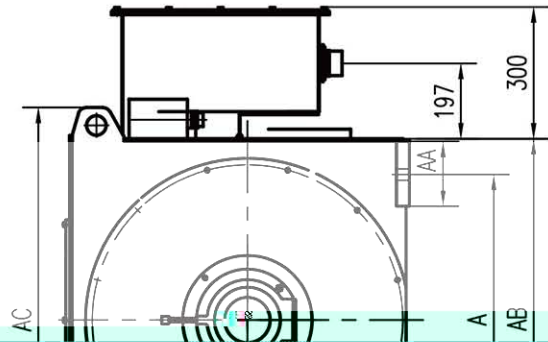

OVERALL DIMENSIONS			
AC	AB	BA	BB
1124	900	610	1520
1201	980	680	1610
1311	1120		1750
1410	1220	720	1880
1580	1360	780	2020
1820	1600	850	2170
			185
			1530
			3740

customer!

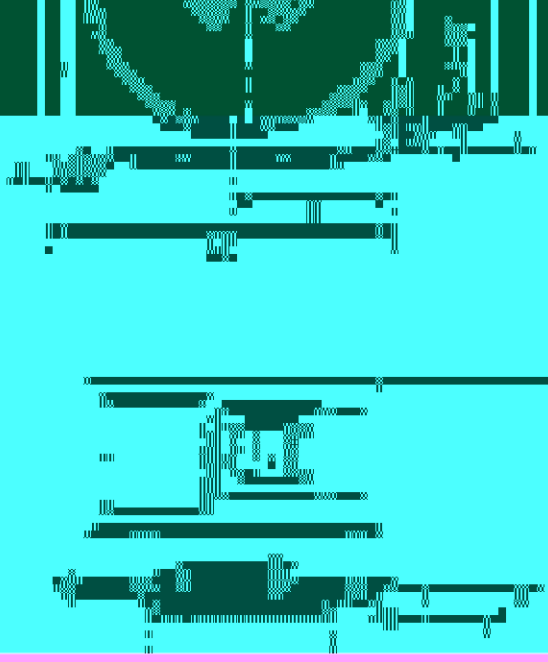

OVERALL DIMENSIONS			
AC	AB	BA	BB
1124	900	610	1520
1201	980	680	1610
1311	1120		1750
1410	1220	720	1880
1580	1360	780	2020
1820	1600	850	2170
			185
			1530
			3740

customer!



OVERALL DIMENSIONS			
AC	AB	BA	BB
1124	900	610	1520
1201	980	680	1610
1311	1120		1750
1410	1220	720	1880
1580	1360	780	2020
1820	1600	850	2170
			185
			1530
			3740

customer!

PERFORMANCE DATA

YR SERIES WINDING ROTOR HIGH-VOLTAGE 3-PHASE INDUCTION MOTORS / 10KV

— 2 —

11

PERFORMANCE DATA


YR SERIES WINDING ROTOR HIGH-VOLTAGE 3-PHASE MOTOR

Model	Rated Power (kW)	Rated Voltage (V)	Rated Current (A)	Efficiency (%)		
				η ₁	η ₂	η ₃
YR200L2-2	0.75	380	1.8	82.0	80.0	78.0
YR200L2-4	0.75	380	1.8	82.0	80.0	78.0
YR200L2-6	0.75	380	1.8	82.0	80.0	78.0
YR200L2-8	0.75	380	1.8	82.0	80.0	78.0
YR200L2-10	0.75	380	1.8	82.0	80.0	78.0
YR200L2-12	0.75	380	1.8	82.0	80.0	78.0
YR200L4-2	1.5	380	3.6	83.0	81.0	79.0
YR200L4-4	1.5	380	3.6	83.0	81.0	79.0
YR200L4-6	1.5	380	3.6	83.0	81.0	79.0
YR200L4-8	1.5	380	3.6	83.0	81.0	79.0
YR200L4-10	1.5	380	3.6	83.0	81.0	79.0
YR200L4-12	1.5	380	3.6	83.0	81.0	79.0
YR200L6-2	2.2	380	5.4	84.0	82.0	80.0
YR200L6-4	2.2	380	5.4	84.0	82.0	80.0
YR200L6-6	2.2	380	5.4	84.0	82.0	80.0
YR200L6-8	2.2	380	5.4	84.0	82.0	80.0
YR200L6-10	2.2	380	5.4	84.0	82.0	80.0
YR200L6-12	2.2	380	5.4	84.0	82.0	80.0
YR200L8-2	3.0	380	7.2	85.0	83.0	81.0
YR200L8-4	3.0	380	7.2	85.0	83.0	81.0
YR200L8-6	3.0	380	7.2	85.0	83.0	81.0
YR200L8-8	3.0	380	7.2	85.0	83.0	81.0
YR200L8-10	3.0	380	7.2	85.0	83.0	81.0
YR200L8-12	3.0	380	7.2	85.0	83.0	81.0
YR200L10-2	4.0	380	9.6	86.0	84.0	82.0
YR200L10-4	4.0	380	9.6	86.0	84.0	82.0
YR200L10-6	4.0	380	9.6	86.0	84.0	82.0
YR200L10-8	4.0	380	9.6	86.0	84.0	82.0
YR200L10-10	4.0	380	9.6	86.0	84.0	82.0
YR200L10-12	4.0	380	9.6	86.0	84.0	82.0
YR200L12-2	5.5	380	14.4	87.0	85.0	83.0
YR200L12-4	5.5	380	14.4	87.0	85.0	83.0
YR200L12-6	5.5	380	14.4	87.0	85.0	83.0
YR200L12-8	5.5	380	14.4	87.0	85.0	83.0
YR200L12-10	5.5	380	14.4	87.0	85.0	83.0
YR200L12-12	5.5	380	14.4	87.0	85.0	83.0
YR200L16-2	7.5	380	19.2	88.0	86.0	84.0
YR200L16-4	7.5	380	19.2	88.0	86.0	84.0
YR200L16-6	7.5	380	19.2	88.0	86.0	84.0
YR200L16-8	7.5	380	19.2	88.0	86.0	84.0
YR200L16-10	7.5	380	19.2	88.0	86.0	84.0
YR200L16-12	7.5	380	19.2	88.0	86.0	84.0
YR200L20-2	11.0	380	28.8	89.0	87.0	85.0
YR200L20-4	11.0	380	28.8	89.0	87.0	85.0
YR200L20-6	11.0	380	28.8	89.0	87.0	85.0
YR200L20-8	11.0	380	28.8	89.0	87.0	85.0
YR200L20-10	11.0	380	28.8	89.0	87.0	85.0
YR200L20-12	11.0	380	28.8	89.0	87.0	85.0
YR200L25-2	15.0	380	38.4	90.0	88.0	86.0
YR200L25-4	15.0	380	38.4	90.0	88.0	86.0
YR200L25-6	15.0	380	38.4	90.0	88.0	86.0
YR200L25-8	15.0	380	38.4	90.0	88.0	86.0
YR200L25-10	15.0	380	38.4	90.0	88.0	86.0
YR200L25-12	15.0	380	38.4	90.0	88.0	86.0
YR200L32-2	22.0	380	54.4	91.0	89.0	87.0
YR200L32-4	22.0	380	54.4	91.0	89.0	87.0
YR200L32-6	22.0	380	54.4	91.0	89.0	87.0
YR200L32-8	22.0	380	54.4	91.0	89.0	87.0
YR200L32-10	22.0	380	54.4	91.0	89.0	87.0
YR200L32-12	22.0	380	54.4	91.0	89.0	87.0
YR200L40-2	30.0	380	72.0	92.0	90.0	88.0
YR200L40-4	30.0	380	72.0	92.0	90.0	88.0
YR200L40-6	30.0	380	72.0	92.0	90.0	88.0
YR200L40-8	30.0	380	72.0	92.0	90.0	88.0
YR200L40-10	30.0	380	72.0	92.0	90.0	88.0
YR200L40-12	30.0	380	72.0	92.0	90.0	88.0
YR200L50-2	40.0	380	96.0	93.0	91.0	89.0
YR200L50-4	40.0	380	96.0	93.0	91.0	89.0
YR200L50-6	40.0	380	96.0	93.0	91.0	89.0
YR200L50-8	40.0	380	96.0	93.0	91.0	89.0
YR200L50-10	40.0	380	96.0	93.0	91.0	89.0
YR200L50-12	40.0	380	96.0	93.0	91.0	89.0
YR200L63-2	55.0	380	128.0	94.0	92.0	90.0
YR200L63-4	55.0	380	128.0	94.0	92.0	90.0
YR200L63-6	55.0	380	128.0	94.0	92.0	90.0
YR200L63-8	55.0	380	128.0	94.0	92.0	90.0
YR200L63-10	55.0	380	128.0	94.0	92.0	90.0
YR200L63-12	55.0	380	128.0	94.0	92.0	90.0
YR200L80-2	75.0	380	176.0	95.0	93.0	91.0
YR200L80-4	75.0	380	176.0	95.0	93.0	91.0
YR200L80-6	75.0	380	176.0	95.0	93.0	91.0
YR200L80-8	75.0	380	176.0	95.0	93.0	91.0
YR200L80-10	75.0	380	176.0	95.0	93.0	91.0
YR200L80-12	75.0	380	176.0	95.0	93.0	91.0
YR200L100-2	100.0	380	230.4	96.0	94.0	92.0
YR200L100-4	100.0	380	230.4	96.0	94.0	92.0
YR200L100-6	100.0	380	230.4	96.0	94.0	92.0
YR200L100-8	100.0	380	230.4	96.0	94.0	92.0
YR200L100-10	100.0	380	230.4	96.0	94.0	92.0
YR200L100-12	100.0	380	230.4	96.0	94.0	92.0
YR200L125-2	132.0	380	297.6	97.0	95.0	93.0
YR200L125-4	132.0	380	297.6	97.0	95.0	93.0
YR200L125-6	132.0	380	297.6	97.0	95.0	93.0
YR200L125-8	132.0	380	297.6	97.0	95.0	93.0
YR200L125-10	132.0	380	297.6	97.0	95.0	93.0
YR200L125-12	132.0	380	297.6	97.0	95.0	93.0
YR200L160-2	180.0	380	403.2	98.0	96.0	94.0
YR200L160-4	180.0	380	403.2	98.0	96.0	94.0
YR200L160-6	180.0	380	403.2	98.0	96.0	94.0
YR200L160-8	180.0	380	403.2	98.0	96.0	94.0
YR200L160-10	180.0	380	403.2	98.0	96.0	94.0
YR200L160-12	180.0	380	403.2	98.0	96.0	94.0
YR200L200-2	250.0	380	544.0	99.0	97.0	95.0
YR200L200-4	250.0	380	544.0	99.0	97.0	95.0
YR200L200-6	250.0	380	544.0	99.0	97.0	95.0
YR200L200-8	250.0	380	544.0	99.0	97.0	95.0
YR200L200-10	250.0	380	544.0	99.0	97.0	95.0
YR200L200-12	250.0	380	544.0	99.0	97.0	95.0
YR200L250-2	330.0	380	720.0	99.5	98.0	96.0
YR200L250-4	330.0	380	720.0	99.5	98.0	96.0
YR200L250-6	330.0	380	720.0	99.5	98.0	96.0
YR200L250-8	330.0	380	720.0	99.5	98.0	96.0
YR200L250-10	330.0	380	720.0	99.5	98.0	96.0
YR200L250-12	330.0	380	720.0	99.5	98.0	96.0
YR200L315-2	450.0	380	960.0	99.8	99.0	97.0
YR200L315-4	450.0	380	960.0	99.8	99.0	97.0
YR200L315-6	450.0	380	960.0	99.8	99.0	97.0
YR200L315-8	450.0	380	960.0	99.8	99.0	97.0
YR200L315-10	450.0	380	960.0	99.8	99.0	97.0
YR200L315-12	450.0	380	960.0	99.8	99.0	97.0



PERFORMANCE DATA
YR SERIES WINDING ROTOR HIGH-VOLTAGE 3-PHASE INDUCTION MOTORS (10kV)

Type	Output KW	Rated Speed r / min	Stator Current A	Full Load		TM/Tn (Standard Value)
				Efficiency % (Standard Value)	Power Factor COSΦ	
YR560-12	255	720	82.0	92.0	0.85	1.0
YR560-12	300	720	98.0	92.0	0.85	1.0
YR560-12	350	720	115.0	92.0	0.85	1.0
YR560-12	400	720	132.0	92.0	0.85	1.0
YR560-12	450	720	148.0	92.0	0.85	1.0
YR560-12	500	720	165.0	92.0	0.85	1.0
YR560-12	550	720	182.0	92.0	0.85	1.0
YR560-12	600	720	198.0	92.0	0.85	1.0
YR560-12	650	720	215.0	92.0	0.85	1.0
YR560-12	700	720	232.0	92.0	0.85	1.0
YR560-12	750	720	248.0	92.0	0.85	1.0
YR560-12	800	720	265.0	92.0	0.85	1.0
YR560-12	850	720	282.0	92.0	0.85	1.0
YR560-12	900	720	298.0	92.0	0.85	1.0
YR560-12	950	720	315.0	92.0	0.85	1.0
YR560-12	1000	720	332.0	92.0	0.85	1.0
YR560-12	1050	720	348.0	92.0	0.85	1.0
YR560-12	1100	720	365.0	92.0	0.85	1.0
YR560-12	1150	720	382.0	92.0	0.85	1.0
YR560-12	1200	720	398.0	92.0	0.85	1.0
YR560-12	1250	720	415.0	92.0	0.85	1.0
YR560-12	1300	720	432.0	92.0	0.85	1.0
YR560-12	1350	720	448.0	92.0	0.85	1.0
YR560-12	1400	720	465.0	92.0	0.85	1.0
YR560-12	1450	720	482.0	92.0	0.85	1.0
YR560-12	1500	720	498.0	92.0	0.85	1.0
YR560-12	1550	720	515.0	92.0	0.85	1.0
YR560-12	1600	720	532.0	92.0	0.85	1.0
YR560-12	1650	720	548.0	92.0	0.85	1.0
YR560-12	1700	720	565.0	92.0	0.85	1.0
YR560-12	1750	720	582.0	92.0	0.85	1.0
YR560-12	1800	720	598.0	92.0	0.85	1.0
YR560-12	1850	720	615.0	92.0	0.85	1.0
YR560-12	1900	720	632.0	92.0	0.85	1.0
YR560-12	1950	720	648.0	92.0	0.85	1.0
YR560-12	2000	720	665.0	92.0	0.85	1.0
YR560-12	2050	720	682.0	92.0	0.85	1.0
YR560-12	2100	720	698.0	92.0	0.85	1.0
YR560-12	2150	720	715.0	92.0	0.85	1.0
YR560-12	2200	720	732.0	92.0	0.85	1.0
YR560-12	2250	720	748.0	92.0	0.85	1.0
YR560-12	2300	720	765.0	92.0	0.85	1.0
YR560-12	2350	720	782.0	92.0	0.85	1.0
YR560-12	2400	720	798.0	92.0	0.85	1.0
YR560-12	2450	720	815.0	92.0	0.85	1.0
YR560-12	2500	720	832.0	92.0	0.85	1.0
YR560-12	2550	720	848.0	92.0	0.85	1.0
YR560-12	2600	720	865.0	92.0	0.85	1.0
YR560-12	2650	720	882.0	92.0	0.85	1.0
YR560-12	2700	720	898.0	92.0	0.85	1.0
YR560-12	2750	720	915.0	92.0	0.85	1.0
YR560-12	2800	720	932.0	92.0	0.85	1.0
YR560-12	2850	720	948.0	92.0	0.85	1.0
YR560-12	2900	720	965.0	92.0	0.85	1.0
YR560-12	2950	720	982.0	92.0	0.85	1.0
YR560-12	3000	720	998.0	92.0	0.85	1.0
YR560-12	3050	720	1015.0	92.0	0.85	1.0
YR560-12	3100	720	1032.0	92.0	0.85	1.0
YR560-12	3150	720	1048.0	92.0	0.85	1.0
YR560-12	3200	720	1065.0	92.0	0.85	1.0
YR560-12	3250	720	1082.0	92.0	0.85	1.0
YR560-12	3300	720	1098.0	92.0	0.85	1.0
YR560-12	3350	720	1115.0	92.0	0.85	1.0
YR560-12	3400	720	1132.0	92.0	0.85	1.0
YR560-12	3450	720	1148.0	92.0	0.85	1.0
YR560-12	3500	720	1165.0	92.0	0.85	1.0
YR560-12	3550	720	1182.0	92.0	0.85	1.0
YR560-12	3600	720	1198.0	92.0	0.85	1.0
YR560-12	3650	720	1215.0	92.0	0.85	1.0
YR560-12	3700	720	1232.0	92.0	0.85	1.0
YR560-12	3750	720	1248.0	92.0	0.85	1.0
YR560-12	3800	720	1265.0	92.0	0.85	1.0
YR560-12	3850	720	1282.0	92.0	0.85	1.0
YR560-12	3900	720	1298.0	92.0	0.85	1.0
YR560-12	3950	720	1315.0	92.0	0.85	1.0
YR560-12	4000	720	1332.0	92.0	0.85	1.0
YR560-12	4050	720	1348.0	92.0	0.85	1.0
YR560-12	4100	720	1365.0	92.0	0.85	1.0
YR560-12	4150	720	1382.0	92.0	0.85	1.0
YR560-12	4200	720	1398.0	92.0	0.85	1.0
YR560-12	4250	720	1415.0	92.0	0.85	1.0
YR560-12	4300	720	1432.0	92.0	0.85	1.0
YR560-12	4350	720	1448.0	92.0	0.85	1.0
YR560-12	4400	720	1465.0	92.0	0.85	1.0
YR560-12	4450	720	1482.0	92.0	0.85	1.0
YR560-12	4500	720	1498.0	92.0	0.85	1.0
YR560-12	4550	720	1515.0	92.0	0.85	1.0
YR560-12	4600	720	1532.0	92.0	0.85	1.0
YR560-12	4650	720	1548.0	92.0	0.85	1.0
YR560-12	4700	720	1565.0	92.0	0.85	1.0
YR560-12	4750	720	1582.0	92.0	0.85	1.0
YR560-12	4800	720	1598.0	92.0	0.85	1.0
YR560-12	4850	720	1615.0	92.0	0.85	1.0
YR560-12	4900	720	1632.0	92.0	0.85	1.0
YR560-12	4950	720	1648.0	92.0	0.85	1.0
YR560-12	5000	720	1665.0	92.0	0.85	1.0
YR560-12	5050	720	1682.0	92.0	0.85	1.0
YR560-12	5100	720	1698.0	92.0	0.85	1.0
YR560-12	5150	720	1715.0	92.0	0.85	1.0
YR560-12	5200	720	1732.0	92.0	0.85	1.0
YR560-12	5250	720	1748.0	92.0	0.85	1.0
YR560-12	5300	720	1765.0	92.0	0.85	1.0
YR560-12	5350	720	1782.0	92.0	0.85	1.0
YR560-12	5400	720	1798.0	92.0	0.85	1.0
YR560-12	5450	720	1815.0	92.0	0.85	1.0
YR560-12	5500	720	1832.0	92.0	0.85	1.0
YR560-12	5550	720	1848.0	92.0	0.85	1.0
YR560-12	5600	720	1865.0	92.0	0.85	1.0
YR560-12	5650	720	1882.0	92.0	0.85	1.0
YR560-12	5700	720	1898.0	92.0	0.85	1.0
YR560-12	5750	720	1915.0	92.0	0.85	1.0
YR560-12	5800	720	1932.0	92.0	0.85	1.0
YR560-12	5850	720	1948.0	92.0	0.85	1.0
YR560-12	5900	720	1965.0	92.0	0.85	1.0
YR560-12	5950	720	1982.0	92.0	0.85	1.0
YR560-12	6000	720	1998.0	92.0	0.85	1.0
YR560-12	6050	720	2015.0	92.0	0.85	1.0
YR560-12	6100	720	2032.0	92.0	0.85	1.0
YR560-12	6150	720	2048.0	92.0	0.85	1.0
YR560-12	6200	720	2065.0	92.0	0.85	1.0
YR560-12	6250	720	2082.0	92.0	0.85	1.0
YR560-12	6300	720	2098.0	92.0	0.85	1.0
YR560-12	6350	720	2115.0	92.0	0.85	1.0
YR560-12	6400	720	2132.0	92.0	0.85	1.0
YR560-12	6450	720	2148.0	92.0	0.85	1.0
YR560-12	6500	720	2165.0	92.0	0.85	1.0
YR560-12	6550	720	2182.0	92.0	0.85	1.0
YR560-12	6600	720	2198.0	92.0	0.85	1.0
YR560-12	6650	720	2215.0	92.0	0.85	1.0
YR560-12	6700	720	2232.0	92.0	0.85	1.0
YR560-12	6750	720	2248.0	92.0	0.85	1.0
YR560-12	6800	720	2265.0	92.0	0.85	1.0
YR560-12	6850	720	2282.0	92.0	0.85	1.0
YR560-12	6900	720	2298.0	92.0	0.85	1.0
YR560-12	6950	720	2315.0	92.0	0.85	1.0
YR560-12	7000	720	2332.0	92.0	0.85	1.0
YR560-12	7050	720	2348.0	92.0	0.85	1.0
YR560-12	7100	720	2365.0	92.0	0.85	1.0
YR560-12	7150	720	2382.0	92.0	0.85	1.0
YR560-12	7200	720	2398.0	92.0	0.85	1.0
YR560-12	7250	720	2415.0	92.0	0.85	1.0
YR560-12	7300	720	2432.0	92.0	0.85	1.0
YR560-12	7350	720	2448.0	92.0	0.85	1.0
YR560-12	7400	720	2465.0	92.0	0.85	1.0
YR560-12	7450	720	2482.0	92.0	0.85	1.0
YR560-12	7500	720	2498.0	92.0	0.85	1.0
YR560-12	7550	720	2515.0	92.0	0.85	1.0
YR560-12	7600	720	2532.0	92.0	0.85	1.0
YR560-12	7650	720	2548.0	92.0	0.85	1.0
YR560-12	7700	720	2565.0	92.0	0.85	1.0
YR560-12	7750	720	2582.0	92.0	0.85	1.0
YR560-12	7800	720	2598.0	92.0	0.85	1.0
YR560-12	7850	720	2615.0	92.0	0.85	1.0
YR560-12	7900	720	2632.0	92.0	0.85	1.0
YR560-12	7950	720	2648.0	92.0	0.85	1.0
YR560-12	8000	720	2665.0	92.0	0.85	1.0
YR560-12	8050	720	2682.0	92.0	0.85	1.0
YR560-12	8100	720	2698.0	92.0	0.85	1.0
YR560-12	8150	720	2715.0	92.0	0.85	1.0
YR560-12	8200	720	2732.0	92.0	0.85	1.0
YR560-12	8250	720	2748.0	92.0	0.85	1.0
YR560-12	8300	720	2765.0	92.0	0.85	1.0
YR560-12	8350	720	2782.0	92.0	0.85	1.0
YR560-12	8400	720	2798.0	92.0	0.85	1.0
YR560-12	8450	720	2815.0	92.0	0.85	1.0
YR560-12	8500	720	2832.0	92.0	0.85	1.0
YR560-12	8550	720	2848.0	92.0	0.85	1.0
YR560-12	8600	720	2865.0	92.0	0.85	1.0
YR560-12	8650	720	2882.0	92.0	0.85</	

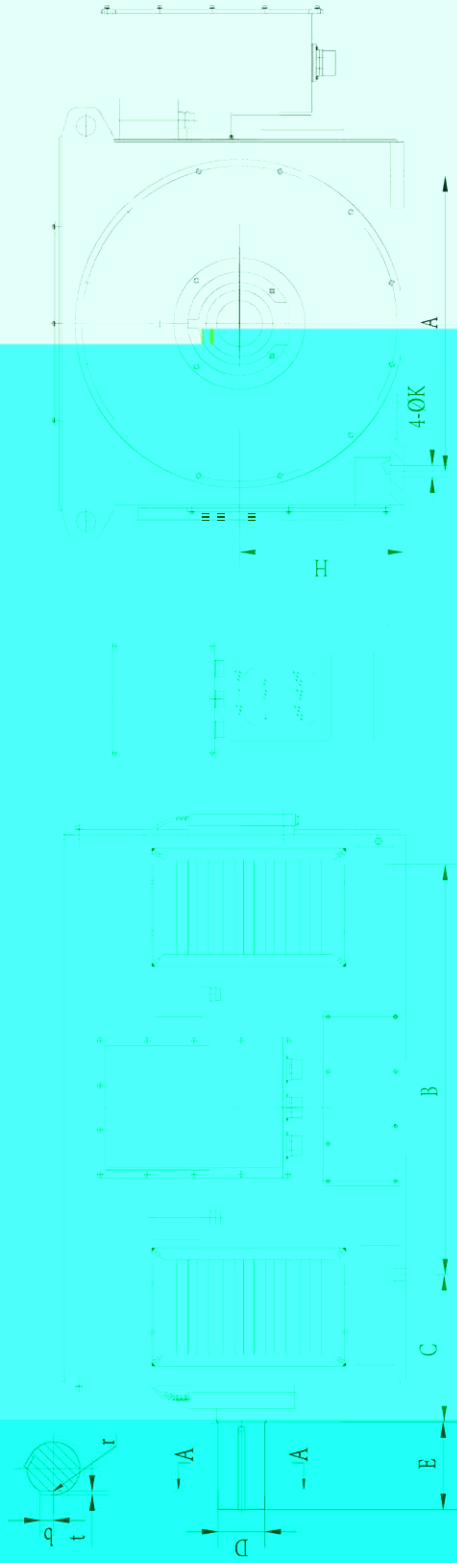

MOUNTING AND OVERALL DIMENSIONS OF YR SERIES WINDING ROTOR HIGH-VOLTAGE 3-PHASE INDUCTION MOTORS (6/10kV)

Frame	Pole	MOUNTING , DIMENSIONS AND TOLERANCE																			
		A		B		C		D		E		t		b		r		H		K	
		Basic size	Limit deviation	Basic size	Limit deviation	Basic size	Limit deviation	Basic size	Limit deviation	Basic size	Limit deviation	Basic size	Limit deviation	Min size	Max size	Basic size	Limit deviation	Basic size	Limit deviation	Basic size	Limit deviation
800	4-12	1600	±2.8	2000	±2.8	530		220	+0.046	350	±0.70	16		1.2	1.6	800	0	56	+0.62		
		1800		2240			+0.017	410		18		+0.3	64.6			900	-1.5	66	0		
900	4-12	2000	±3.5	2500	±3.5	600		280	+0.052	470	±0.77	20		2	2.5	1000					
							+0.020														

Note: We will provide the outline drawing for new order. Performance data is only reference for supplier. If there is any change, we shall not notify any customer!



PERFORMANCE DATA

YR SERIES WINDING ROTOR HIGH-VOLTAGE 3-PHASE INDUCTION MOTORS (6kV)

Type	Output KW	Rated Speed r / min	Stator Current A	Full Load		TM/Tn (Standard Value)
				Efficiency % (Standard Value)	Power Factor COSΦ	
YR800-4	4500	1500	517.4	96.2	0.87	1.8
YR800-4	5000	1500	574.3	96.3	0.87	1.8
YR800-4	5600	1500	642.5	96.4	0.87	1.8
YR800-6	3150	1000	372.2	95.8	0.85	1.8
YR800-6	3550	1000	419.1	95.9	0.85	1.8
YR800-6	4000	1000	471.7	96.0	0.85	1.8
YR800-6	4500	1000	530.1	96.1	0.85	1.8
YR800-8	2500	750	304.1	95.3	0.83	1.8
YR800-8	2800	750	340.3	95.4	0.83	1.8
YR800-8	3150	750	377.9	95.5	0.84	1.8
YR800-10	2000	600	250.9	94.7	0.81	1.8
YR800-10	2240	600	280.7	94.8	0.81	1.8
YR800-10	2500	600	313.0	94.9	0.81	1.8
YR800-12	1600	500	209.8	94.1	0.78	1.8
YR800-12	1800	500	235.7	94.2	0.78	1.8
YR800-12	2000	500	261.7	94.3	0.78	1.8
YR800-12	2240	500	292.7	94.4	0.78	1.8
YR800-16	1000	375	143.9	92.9	0.72	1.8
YR800-16	1120	375	161.0	93.0	0.72	1.8
YR800-16	1250	375	179.4	93.1	0.72	1.8
YR800-16	1400	375	200.8	93.2	0.72	1.8
YR900-8	3550	750	425.4	95.6	0.84	1.8

PERFORMANCE DATA
YR SERIES WINDING ROTOR HIGH-VOLTAGE 3-PHASE INDUCTION MOTORS (6kV)

Type	Output KW	Rated Speed r/min	Stator Current A	Full Load		TM/Tn (Standard Value)
				Efficiency % (Standard Value)	Power Factor COSΦ	
YR900-8	4000	750	479.9	95.7	0.94	1.9

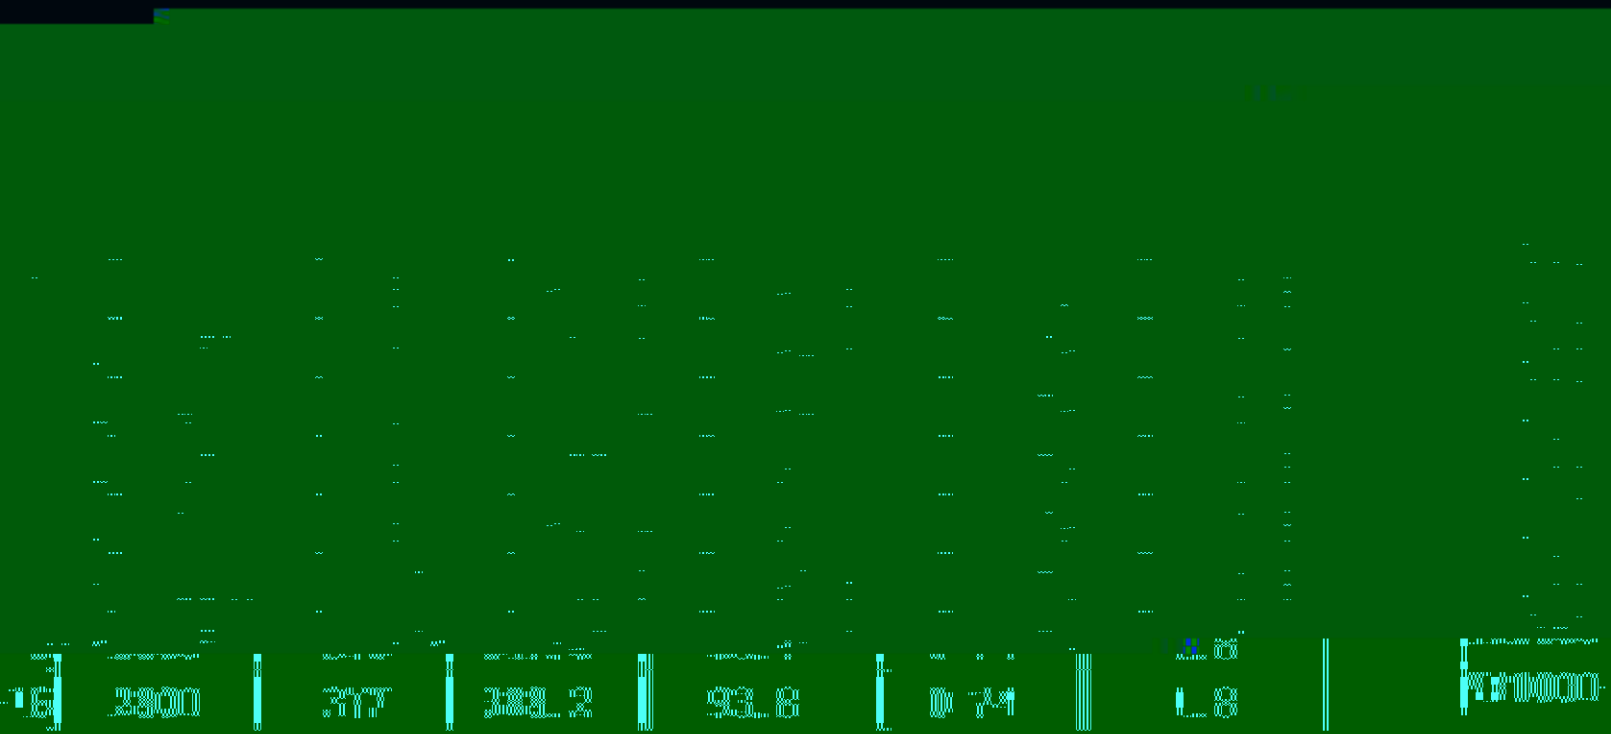

PERFORMANCE DATA

YR SERIES WINDING ROTOR HIGH-VOLTAGE 3-PHASE INDUCTION MOTORS (6kV)

Type	Output KW	Rated Speed r / min	Stator Current A	Full Load		TM/Tn (Standard Value)
				Efficiency % (Standard Value)	Power Factor COSΦ	
YR800-4	4000	1500	280.0	95.9	0.86	1.8
YR800-4	4500	1500	314.7	96.0	0.86	1.8
YR800-4	5000	1500	349.3	96.1	0.86	1.8
YR800-4	5600	1500	390.8	96.2	0.86	1.8
YR800-6	2800	1000	204.0	95.5	0.83	1.8
YR800-6	3150	1000	226.5	95.6	0.84	1.8
YR800-6	3550	1000	255.0	95.7	0.84	1.8
YR800-8	2500	750	185.3	95.0	0.82	1.8
YR800-8	2800	750	207.3	95.1	0.82	1.8
YR900-6	4000	1000	287.0	95.8	0.84	1.8
YR900-6	4500	1000	322.5	95.9	0.84	1.8
YR900-6	5000	1000	358.0	96.0	0.84	1.8
YR900-8	3150	750	233.0	95.2	0.82	1.8
YR900-8	3550	750	259.1	95.3	0.83	1.8
YR900-10	2500	600	199.7	94.6	0.80	1.8
YR900-10	2800	600	213.4	94.7	0.80	1.8
YR1000-8	4000	750	291.7	95.4	0.83	1.8
YR1000-8	4500	750	327.8	95.5	0.83	1.8
YR1000-8	5000	750	363.8	95.6	0.83	1.8
YR1000-10	3150	600	236.8	94.8	0.81	1.8
YR1000-10	3550	600	266.6	94.9	0.81	1.8
YR1000-12	2500	500	199.0	94.2	0.77	1.8
YR1000-12	2800	500	222.6	94.3	0.77	1.8
YR1000-12	3150	500	247.0	94.4	0.78	1.8
YR1000-12	3550	500	278.1	94.5	0.78	1.8